


515 Miniature Cartridge Fuse



Dimensions (unit: mm)



Main Characteristics

Miniature fuse; Very Fast-Acting

Standard

UL248-14

Materials

Tube: Ceramic Tube

End Caps: Nickel plated copper

Operating Temperature

-55°C to +125°C

Storage Conditions

+10°C to +60°C

Relative humidity: ≤75% yearly average

Without dew, maximum 30 days at 95%

Vibration Resistance

24 cycles at 15 min. each (60068-6)

10-60Hz at 0.75mm amplitude

60-2000Hz at 10g acceleration

Soldering Parameters


260°C. ≤5 sec (Wave Soldering)

350°C. ≤3 sec (Hand Soldering)

Soldering Peak:

260°C. 10 sec. (IEC 60068-20)

Average Current Curve(I-T Curve)

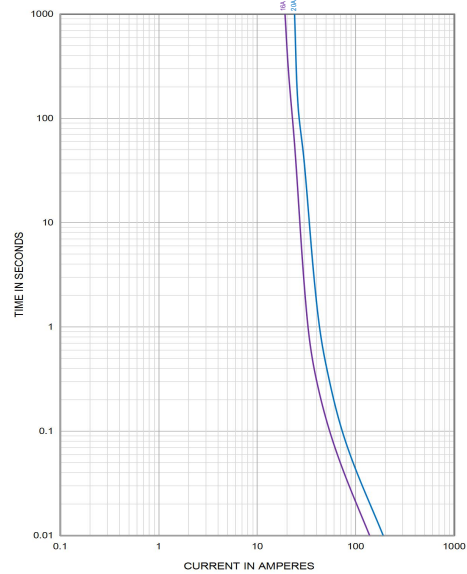

Time vs Current Characteristics: UL 248-14

Rated Current	100%	150%	250%
16A~20A	>4H	<120s	<1s



Electrical Characteristics at 25°C

Amp Code	Rated Current	Max. Voltage	Nominal Melting I ² t (A ² sec)	Breaking Capacity	Approvals
					cURus
1600	16A	300V AC	183.46	1500A@250V AC 1500A@300V AC	•
2200	20A	300V AC	357.33	750A@250V AC 750A@300V AC	•

Notes: (1) Permissible continuous operating current is ≤100% at ambient temperature of 23°C (73.4°F)
(2) Typical pre-arcing I²t are measured at 10I_n current.

Ordering Information

Series	Amp Code	Supplementary Code	Qty
515			