



065 Chip Fuse



Dimensions (unit: mm)

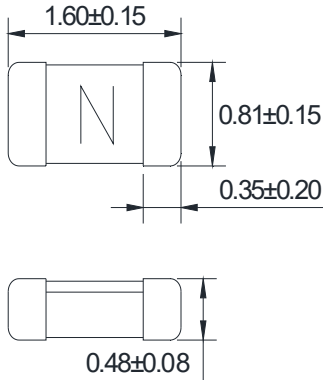

Main Characteristics

Chip fuse; Fast-Acting(F)

Standard

UL248-14

Materials

Substrate: Ceramic

Termination: Silver over-plated with
nickel and Tin

Operating Temperature

-55℃ to +150℃

Storage Conditions

+10℃ to +60℃

Relative humidity: ≤75% yearly average
Without dew, maximum 30 days at 95%

Vibration Resistance

120 cycles in 1 direction at 1 min. each
10-55Hz, 3 directions(X, Y, Z) in total
According to MIL-STD-202 Method 201A

Soldering Parameters


260℃. ≤10 sec (Wave Soldering)

300℃. ≤2 sec (Hand Soldering)

Soldering Peak:

260℃. 10 sec.

280℃. 5 sec. (IEC 60068-20)

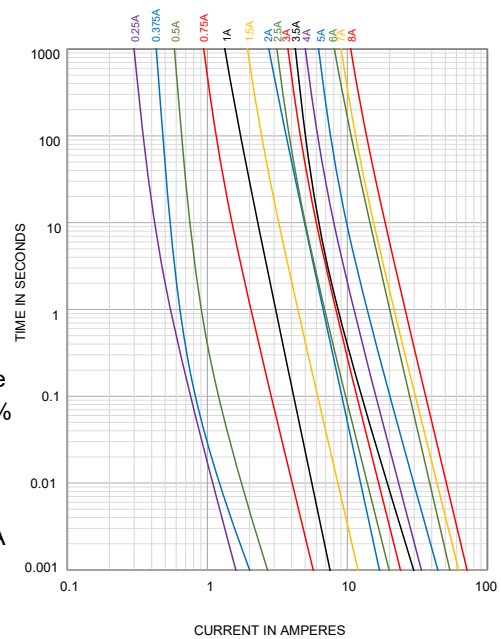

Time vs Current Characteristics: UL248-14

Rated Current	100%	200%
250mA~8A	>4H	<60s

RoHS **HF**

Electrical Characteristics at 25℃

Amp Code	Rated Current	Rated Voltage	Typical Voltage Drop Max(mV)	Breaking Capacity	Typical Melting I²t (A²s)	Typical Cold Resistance (mΩ)	Alpha Mark	Approvals
								cURus
0250	250mA	32V DC	893	50A@32V DC	0.00042	3250	D	•
0375	375mA		587		0.00093	1800	E	•
0500	500mA		582		0.001	1070	F	•
0750	750mA		427		0.009	470	G	•
1100	1.00A		335		0.0095	250	B	•
1150	1.50A		270		0.04	150	H	•
1200	2.00A		160		0.11	78	K	•
1250	2.50A		145		0.135	49	L	•
1300	3.00A		130		0.21	35	O	•
1350	3.50A		130		0.45	28	R	•
1400	4.00A		120		0.56	18	S	•
1500	5.00A		110		1.20	14	T	•
1600	6.00A		110		1.70	11.0	V	•
1700	7.00A		80		2.30	9.5	X	•
1800	8.00A		75		3.0	7.0	Z	•

Note: 1. DC Interrupting Rating (Measured at rated voltage, time constant of less than 50 microseconds, battery source)
2. DC Cold Resistance are measured at <10% of rated current in ambient temperature of 25degrees
3. Typical Pre-arcing I²t are measured at 10In Current
4. For 1A-5A, the color of glass coating is Green; for others, it's Blue.
Specifications are subject to change without notice. Application testing is strongly recommended.

Ordering Information

Series	Amp Code	Supplementary Code	Qty
065			